

Indoor S Series

Standard Air-Cooled, Closed Loop
2 to 20 tons of Cooling
Fluid Temperature Range +50 to +90°F
Ambient Temperature Range +50 to +95°F

For Use With Water/Glycol Process Fluid



Features Included:

- Air-cooled, closed loop design
- Self-contained with process pump
- Easy-to-read digital temperature controller
- Fused disconnect
- Brazed plate evaporator
- Vertical air discharge
- Cleanable air filters
- Non-ferrous wetted components
- Manual bypass
- Fluid level sight glass
- Seamless plastic tank
- Molded plastic plumbing
- Durable RAL 7035 powder-coated finish
- Built to meet UL 1995
- 18 month parts and labor warranty
- 24/7 service and support


Designed and Assembled in the USA

Standard Options Available:

- Pressure relief bypass valve
- Anti backflow kit
- Fluid level switch interlock
- Low fluid level warning
- Auto make-up
- Inlet water filter
- Casters (up to 5 tons)
- Pump upgrades for increased pressure
- Pump upgrades for increased flow
- Voltage options
- Service/maintenance packages

Indoor S Series

Indoor S Series

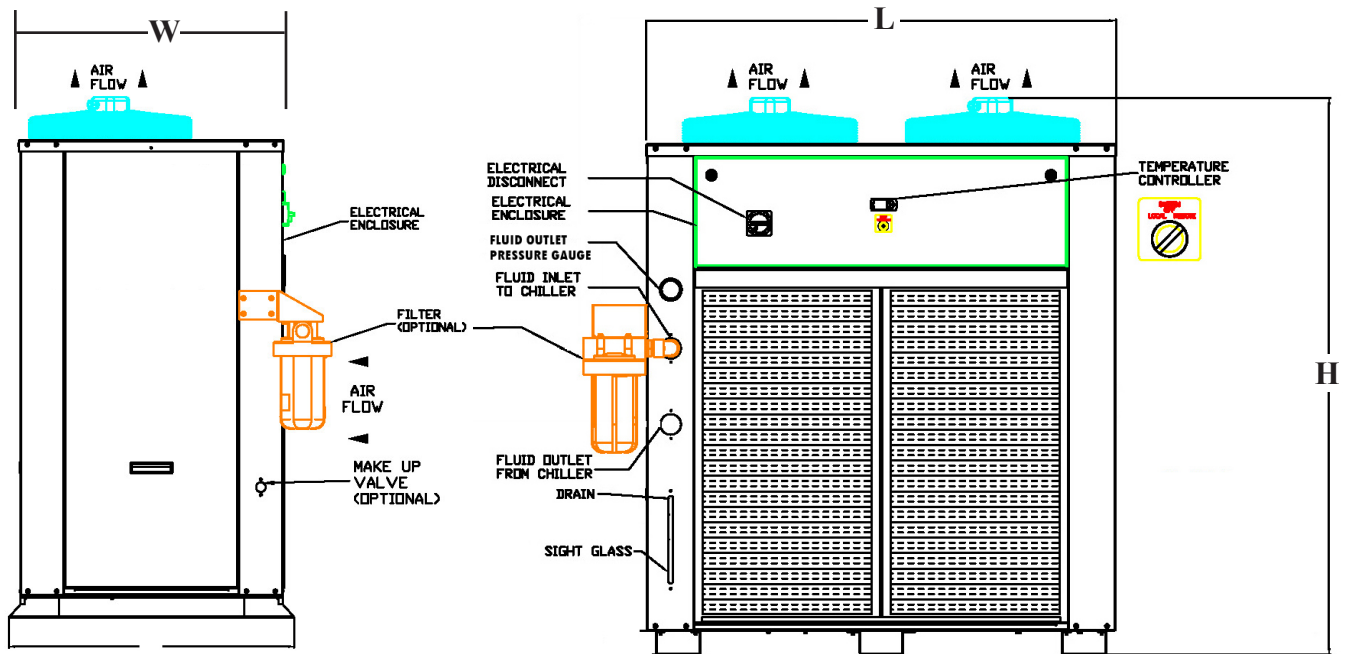

Description	Volts/Ph	BTU/hr 65 Fluid@80°F	Pump HP	GPM	Total AMP	Fluid Port Female NPT	Tank Gallons	LxWxH
SVI-2000-M	230/1/60 (+/- 10%)	24,000	1	Stock Pump 10 GPM at 35 PSI and 20 GPM at 25 PSI	33.2	1 1/4"	8	29"31"50
		22,725	1.5	Pressure Upgrade 10 GPM at 80 PSI and 12 GPM at 70 PSI	33.2			
SVI-2000-M	230/3/60 (+/- 10%)	24,000	1	Stock Pump 10 GPM at 35 PSI and 20 GPM at 25 PSI	24.0	1 1/4"	8	29"31"50
		22,725	1.5	Pressure Upgrade 10 GPM at 80 PSI and 12 GPM at 70 PSI	26.0			
SVI-2000-M	480/3/60 (+/- 10%)	24,000	1	Stock Pump 10 GPM at 35 PSI and 20 GPM at 25 PSI	11.5	1 1/4"	8	29"31"50
		22,725	1.5	Pressure Upgrade 10 GPM at 80 PSI and 12 GPM at 70 PSI	12.5			
SVI-3000-M	230/3/60 (+/- 10%)	36,000	2	Stock Pump 10 GPM at 45 PSI	25.6	1 1/2"	38	35"37"68
		36,000	2	Pressure Upgrade 10 GPM at 80 PSI	27.6			
SVI-3000-M	480/3/60 (+/- 10%)	36,000	2	Stock Pump 10 GPM at 45 PSI	12.3	1 1/2"	38	35"37"68
		36,000	2	Pressure Upgrade 10 GPM at 80 PSI	13.3			
SVI-5000-M	230/3/60 (+/- 10%)	60,000	2	Stock Pump 15 GPM at 45 PSI	36.6	1 1/2"	38	35"37"68
		60,000	2	Pressure Upgrade 15 GPM at 80 PSI	38.6			
SVI-5000-M	480/3/60 (+/- 10%)	60,000	2	Stock Pump 15 GPM at 45 PSI	18.3	1 1/2"	38	35"37"68
		60,000	2	Pressure Upgrade 15 GPM at 80 PSI	19.3			
SVI-7500-M	480/3/60 (+/- 10%)	90,000	2	Stock Pump 25 GPM at 40 PSI	25.5	2"	60	57"37"68
		90,000	2	Pressure Upgrade 25 GPM at 60 and 25 GPM at 80 PSI	25.5			
SVI-10000-M	480/3/60 (+/- 10%)	120,000	3	Stock Pump 30 GPM at 40 PSI	30.4	2"	60	57"37"68
		120,000	3	Pressure Upgrade 30 GPM at 80 PSI	30.4			
SVI-15000-M	480/3/60 (+/- 10%)	180,000	5	Stock Pump 60 GPM at 45 PSI	49.8	2"	88	57"60"68
		180,000	5	Pressure Upgrade 60 GPM at 80 PSI	49.8			
SVI-20000-M	480/3/60 (+/- 10%)	240,000	5	Stock Pump 60 GPM at 45 PSI	60.5	2"	88	57"60"68
		240,000	5	Pressure Upgrade 60 GPM at 60 PSI and 60 GPM at 80 PSI	60.1			